





Removal of Cooling Deck

#	Procedure	Visuals
1	Loosen the screws on the front grill.	
2	Remove the screws securing the cooling deck to the cabinet.	
3	Slide up the Lift Bar holder.	
4	Unplug the power cord.	


5

Rotate the lift bars inward to release the seal of the cooling deck from the cabinet.



6

Slide the cooling deck out of the base of the cooler by pulling on the lift bars only.

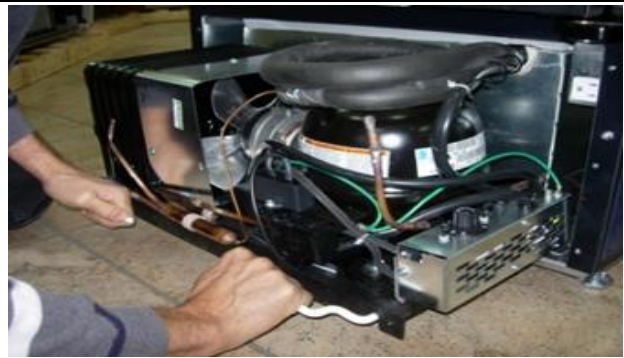

7

Reverse the process for re-installing the cooling deck. Please be sure to re-install the screws to secure the cooling deck to the cabinet (Step #2) and the lift bar lock must be in place.

